

# Micro Flow II Ductless Workstation


The MicroFlow II Workstation ideal for: A class 1 ductless hood workstation. Equipped with Activated Carbon filtration, for fumes, odors, non-hazardous chemical vapors and particulate filtration.




- Completely self contained with integral recessed work surface to contain spills. Clear hood surround with safety viewing sash allows visibility from 3 sides, and provides both safety and access to inside work area. Sash can be conformed for use with a microscope.
- Variable speed fan control. High speed for 100f/m. Air flow thru sash opening. Medium and Low flow for sensitive operations.
- Operates on 115v AC, or 230v International, Conforms to UL, CSA, & CE requirements. Electrical cord port exits both sides.
- Easy change out of used filter. Equipped with a Filter change light. Recommend filter change every 60-90 days. Filter life varies with usage.

## Typical Applications:

- General chemistry involving small volumes of common chemicals, Individual Work stations
- Tissue staining and processing
- Gluing & Drying operations
- Solvent cleaning of electronic parts
- Soldering fumes and odors
- School demonstration workstations
- Containment of Forensic applications

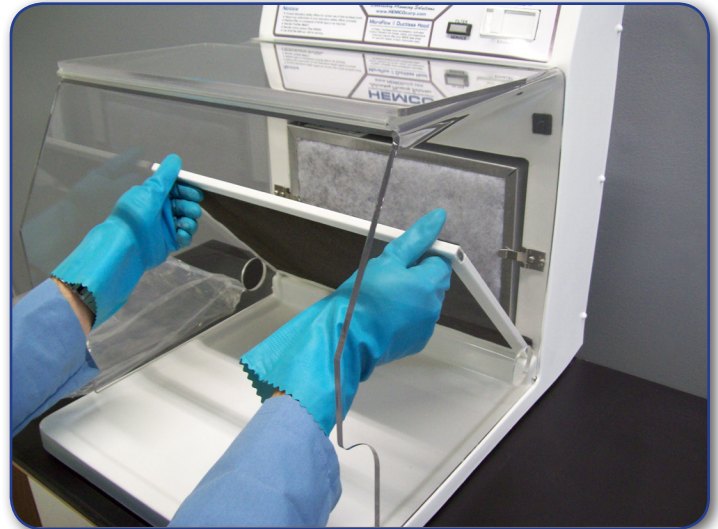

Replacement of pre-filter on Micro Flow II

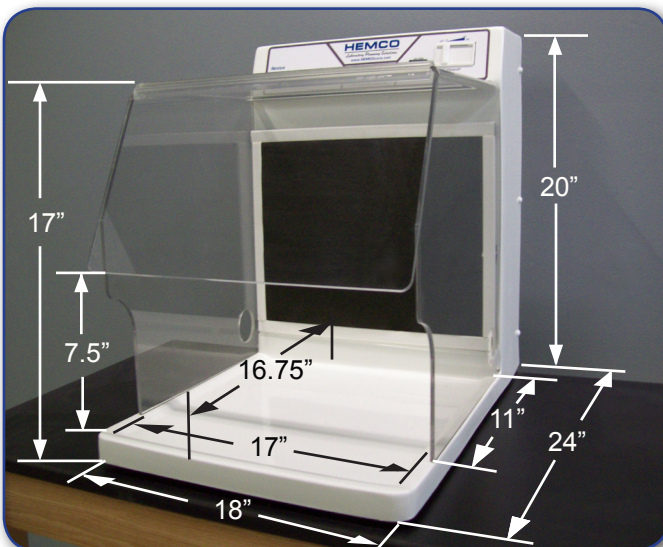

## Specifications:

1. **MicroFlow II Workstation**  
115v. Model # 64010
2. **Replacement Carbon Filter** Model # 52004
3. **Replacement Prefilter** Model # 64011

Visit [www.HEMCOcorp.com](http://www.HEMCOcorp.com)